

## Zip Chillmaster

Instant Chilled Filtered Drinking Water  
Free-Standing and Wall-Mounted Commercial Chillers



### Features

Instant chilled filtered drinking water for public areas

Heavy duty, easy-to-clean stainless steel bowl and stainless steel case

Cost effective solution to providing chilled filtered water

Delivers refreshingly chilled water between 7°C and 12°C

Filter change reminder light signals when filter cartridge replacement is due

Efficient air cooled refrigeration system that costs only cents a day in energy running costs!

Product Details	Order Code	Initial draw off glasses	Recovery glasses p/hr	Compressor	Dimensions (mm)		
					A	B	C
Chillmaster 0.2 Micron Filtered	CM1501	8	140	0.25	350	350	903
Chillmaster wall Mounted - unfiltered	CM1502	8	140	0.25	350	350	530

- Free-standing upright drinking water chiller perfect for public areas.
- Wall mounted version also available.
- Chrome plated brass carafe with swivel head for easy filling of bottles and push action bubbler as standard.
- Stainless steel water bowl and brushed stainless steel case with front access panel.
- Delivers 140 glasses per hour of chilled filtered water within the operating range of 7°C to 12°C.
- Fan cooled condenser with a compressor rated at 0.25 hp.
- ø12.7 mm BSP water connections.
- Adjustable levelling feet on upright models.
- Integrated surge protection.
- Integral 'P' trap or 'S' trap.

**Location**

To be positioned where it is easy for users to access.

Water, drainage and power should be nearby within length of connections provided. Free-standing chiller should be situated on a level surface (adjustable levelling feet are provided with unit).

Wall-mounted chiller should be mounted on an suitable wall allowing appropriate access.

To be installed with clearances of 50 mm to the left, right and rear of unit.

**Electrical**

To be connected to a 10amp GPO, 220V - 240V AC power supply and in accordance with AS/NZS 3350 wiring regulations.

**Plumbing 40 mm Drainage**

To be installed by a qualified tradesperson in accordance with manufacturer's instructions and AS/NZS 3500 plumbing regulations.

Water connections 12.7 mm BSP.

Designed for direct connection to a potable cold water supply with minimum pressure of 70kPa; maximum 700kPa. If static pressure

exceeds 180kPa; a 500kPa pressure limiting valve must be fitted.

**Caution**

In some hard water areas where mineral scale accumulation may be a problem, consideration should be given to the maintenance required. A suitable form of water treatment may be necessary.

**Accessories**

99015 - Disposable cup dispenser

99016 - Waste water dish

91291 - Replacement filter cartridge

**Warranty**


1 year parts and labour warranty.

**Technical Assistance**


Zip Heaters (Aust) Pty Ltd  
 67-77 Allingham Street  
 Condell Park NSW 2200  
 Free Call 1800 638 622  
 Telephone 02 9796 3100  
 www.zipindustries.com

**Free Standing**


**Wall Mount**

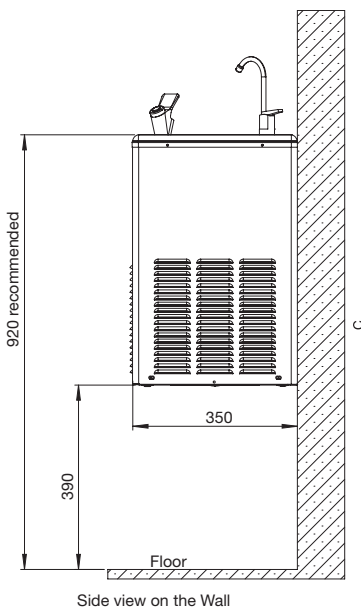

**Dimensions (see table below)**

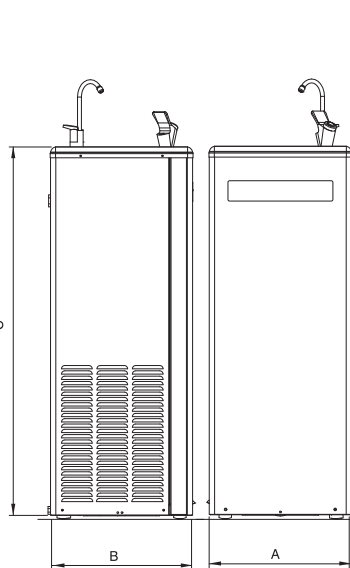

**Typical Installation**

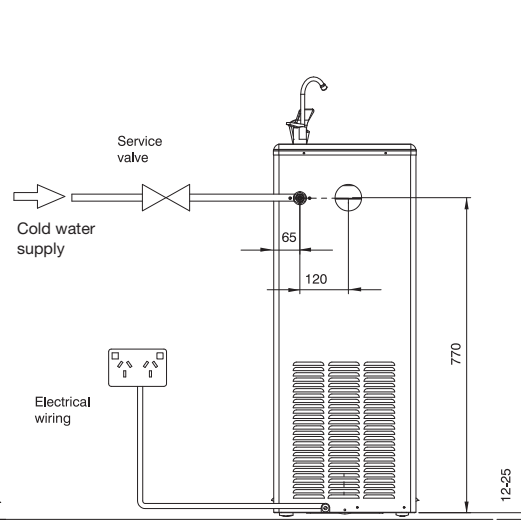

Note: Drawing is for specification purposes and carafe may differ from that depicted.